

# CONAN

SUPERIOUR COLOUR MIXING  
EXCEPTIONALLY SMOOTH PROJECTION


The CLF Conan is an innovative concept which combines superior RGBW colour mixing and smart design. Specially selected high quality Osram LEDs provide deep, saturated colors with an outstanding white balance and the distinct lens design takes care of the exceptionally smooth projection. Guaranteed flicker free operation makes the Conan suitable for tv shows, theatre and corporate events. The Conan features a very quick zoom function with a wide range of 11° to 58°. The unique shape of the Conan prevents cables to be in sightlines. The fixture has a double bracket so it can be placed on the floor or mounted to truss structures by using the unique CLF quicklock system. This hanging system is easy to use and time-

saving. A clear LCD display on the back of the Conan gives access to all settings, including 4 different dimmer curves. Controlled by DMX, the Conan offers extensive colour temperature control and a pre-programmed FX engine. Standard the Conan comes with 5p XLR connectors, but can be easily swapped to 3p XLR using the supplied board. Available accessories are a detachable snoot, barndoor and a Wireless Solution W-DMX™ receiver. All in all, the CLF Conan is the only choice for professional and high demanding users.



## CLF CONAN

- VERY FAST AND WIDE ZOOM 11° - 58°
- RGBW COLOUR MIXING BEHIND THE LENS
- DOUBLE BRACKET FOR FLOOR OR TRUSS MOUNTING
- UNIQUE & SMART DESIGN
- UNIQUE CLF QUICKLOCK SYSTEM
- FLICKER FREE OPERATION
- WIRELESS (OPTIONAL)

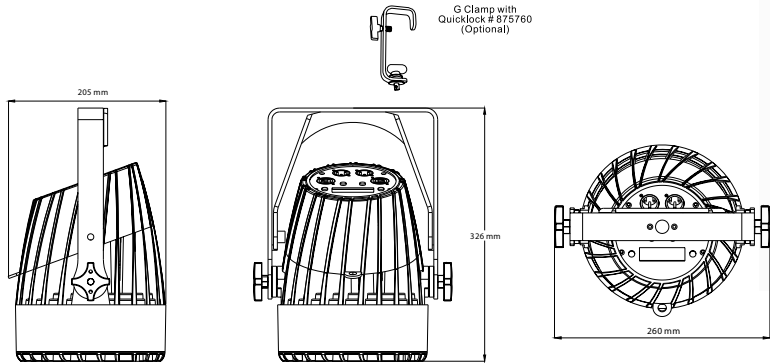

Small Zoom				
Flux out: 1097 lm				
9.843ft	471.1,670.2fc	1.497ft		
3m	5071,7214lx	45.64cm		
13.12ft	265.0,377.0fc	1.997ft		
4m	5071,7214lx	60.85cm		
16.40ft	169.6,241.3fc	2.496ft		
5m	1825,2597lx	76.07cm		
19.69ft	117.8,167.5fc	2.995ft		
6m	1268,1803lx	91.28cm		
22.97ft	86.53,123.1fc	3.494ft		
7m	931.4,1325lx	106.50cm		
Height	Eavg,Emax	Angle: 8.70°	Diameter	

Wide Zoom				
Flux out: 949.5 lm				
3.281ft	300.4,445.9fc	1.99		
1m	3233,4799lx	59.24		
6.562ft	75.10,111.5fc	3.88		
2m	808.3,1200lx	118.49		
9.843ft	33.38,49.54fc	5.83		
3m	359.3,533.2lx	177.73		
13.12ft	18.77,27.87fc	7.77		
4m	202.1,299.9lx	236.97		
16.40ft	12.02,17.83fc	9.71		
5m	129.3,192.0lx	296.21		
Height	Eavg,Emax	Angle: 33°	Diameter	



### FACTSHEET

DMX channels	10 or 21 channels
Beam angle	11 - 58° (quick zoom)
Power supply	100 - 240 VAC
Power consumption	Max. 110 Watt
Cooling	Low noise regulated fan
DMX connection	3 & 5p XLR in & out
Dimensions	326 x 260 x 205 mm (hwxwd)
Weight	4,8 Kg
Certification mark	CE
Article number	156130
Included items	Power cable
IP rating	IP22